



Variante


D

MASTERTRACK® BT CEILING & WALL MOUNTING


Product highlights

- Simple glass clamping mechanism for a secure hold
- Installation with and without fixed glazing
- Height adjustment +/- 3 mm
- Smooth closing mechanism
- Safe anti-jump protection
- Optional metal damper with high-quality hydraulics and double-sided spring guide
- Synchronous opening possible



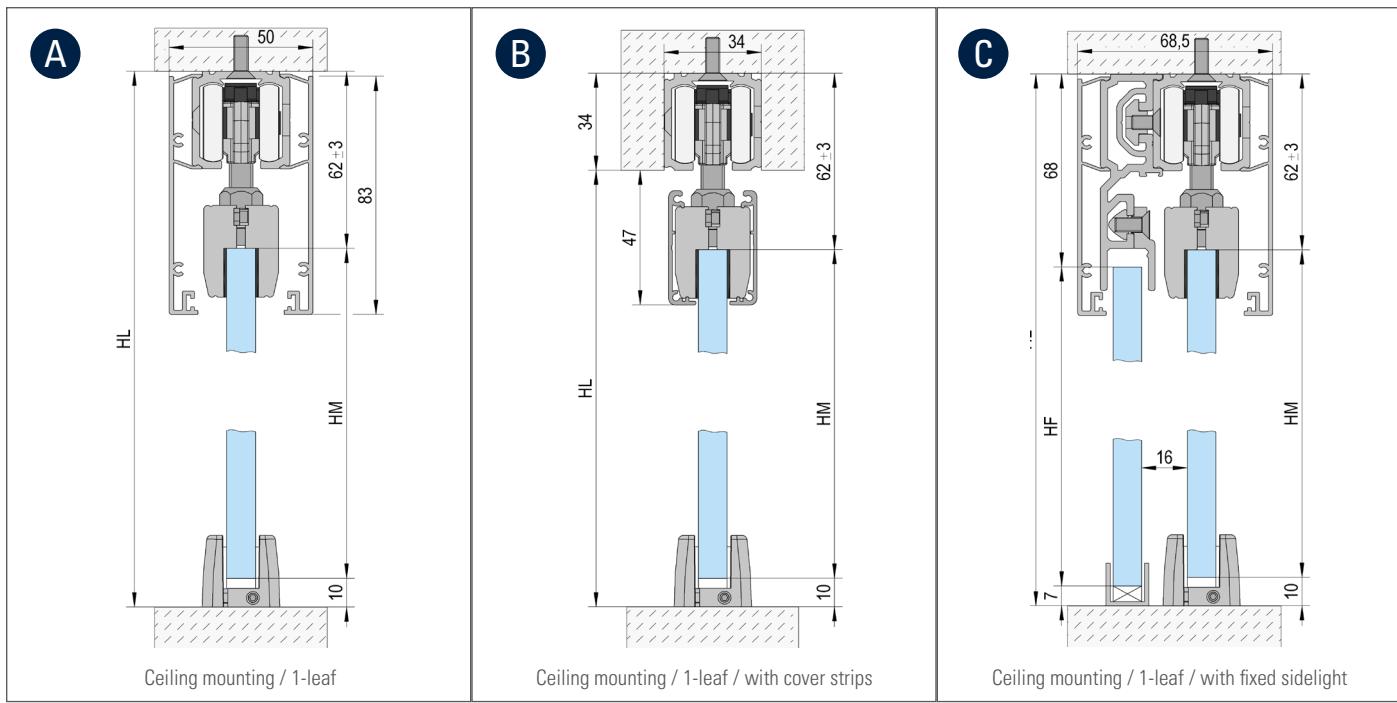

Glass height (HM) = HL - 70 mm / Fixed sidelight (HF) = HL - 75 mm

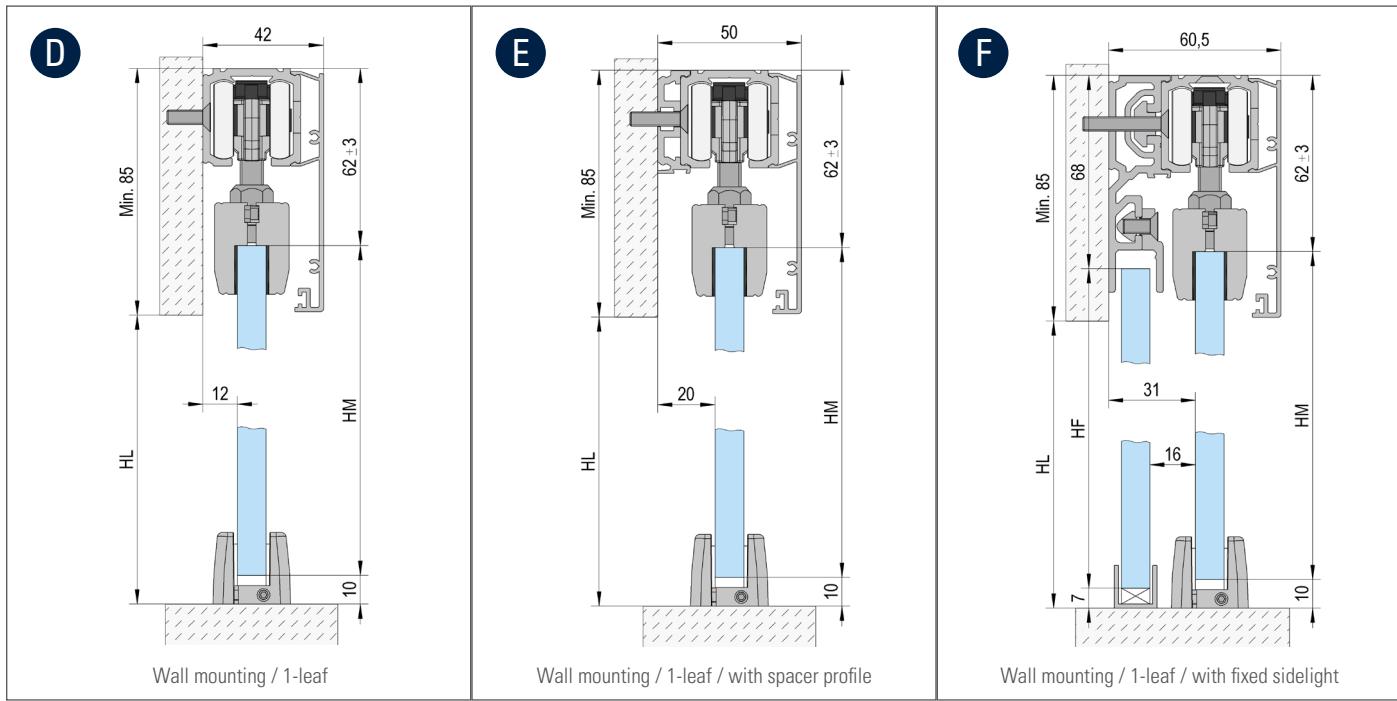

Glass height (HM) = HL + 15 mm / fixed glass part (HF) = HL + 10 mm

PRODUCT	ART. NO.	A	B	C	D	E	F
Running Track 2/3/4/6m	BO 5802011/5803011/5804011/5806011	1x	1x	1x	1x	1x	1x
Supplementary profile for fixed sidelights 2m	BO 5802031			*			*
Snapframe and cover caps for pair of glass clamps	BO 5801271			1x			
Wall distance profile 2m	BO 5802061						*
Carriages	BO 5800002	1x	1x	1x	1x	1x	1x
Carriages incl. damping mechanism**	BO 5800060/5800080/5800120	2x**	2x**	2x**	2x**	2x**	2x**
Glass clamp	BO 5800001	2x	2x	2x	2x	2x	2x
Cover 83 mm height 2/3/4/6m	BO 5802021/5803021/5804021/5806021	2x		2x	1x	1x	1x
Bottom guide	BO 5700005	1x	1x	1x	1x	1x	1x
U-Channels 2.5/5m	BO 6703434/6703446			1x			1x

** Quantity depends on the length of the Running Track

** Alternative to carriage unit BO 5800002 - The carriage units are integrated in the retractable dampers.
To install damping on both sides, two carriages are replaced by two retractable dampers..