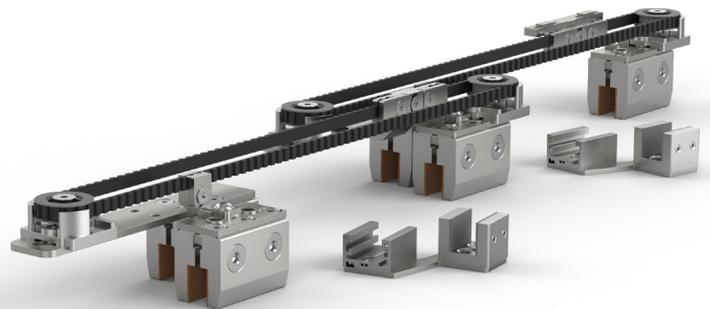


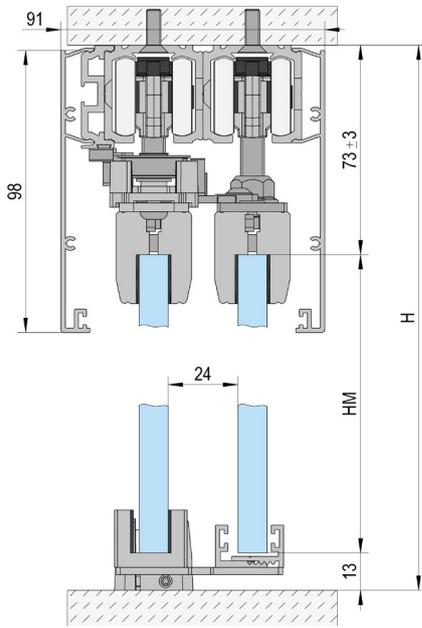


# MASTERTRACK® BT TELESCOPIC SOLUTION

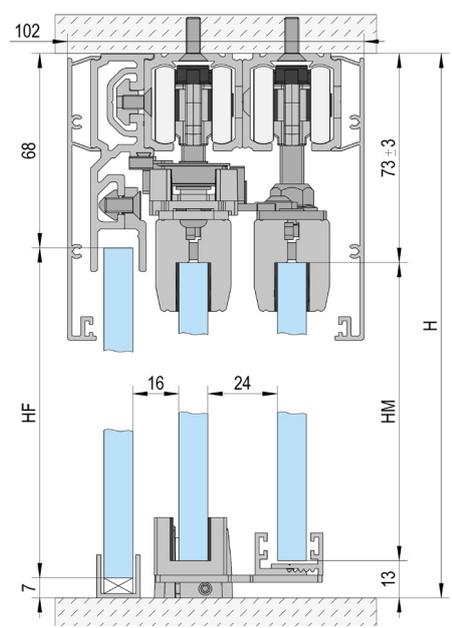
## Product highlights

- Simultaneous movement of double or triple leaf doors
- Floating floor guide
- Simple glass clamping mechanism for a secure hold
- Installation with or without fixed glazing
- Height adjustment +/- 3 mm
- Smooth closing mechanism
- Safe anti-jump protection
- Optional metal damper with high-quality hydraulics and double-sided spring guide

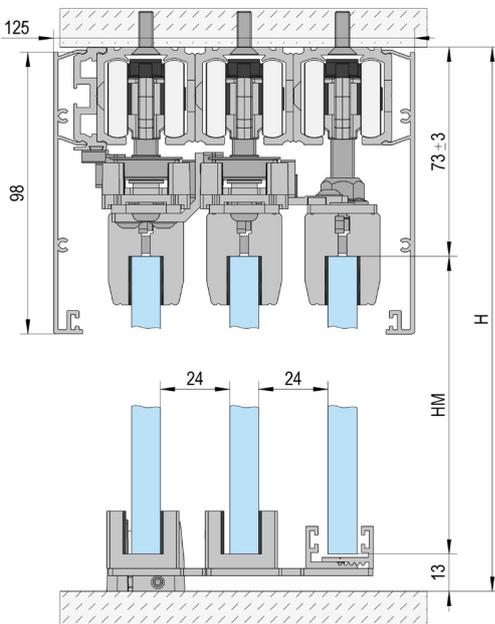


**A**

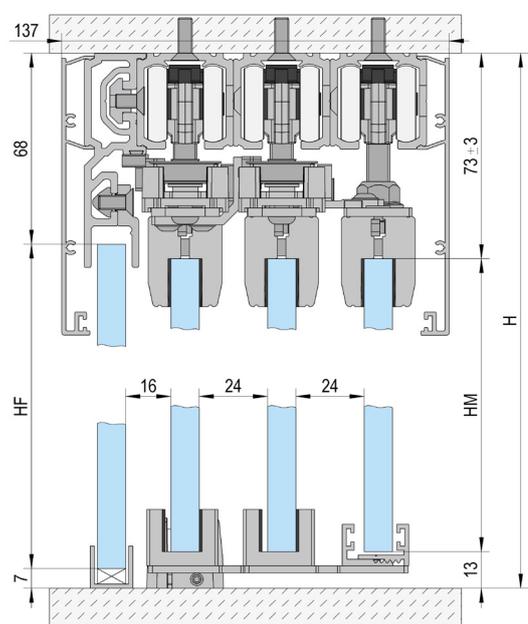
Ceiling mounting / 2-leaf

**B**

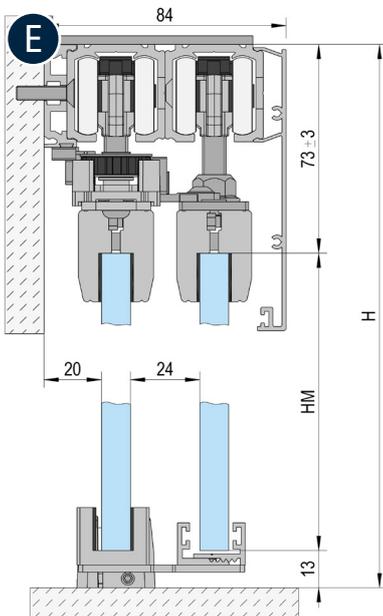
Ceiling mounting / 2-leaf / with fixed glazing

**C**

Ceiling mounting / 3-leaf

**D**

Ceiling mounting / 3-leaf / with fixed glazing

**E**

Wall mounting / 2-leaf

Glass height (HM) = H - 87 mm / Fixed sidelight (HF) = H - 75 mm

PRODUCT	ART. NO.	A	B	C	D	E
Running Track 2/3/4m	BO 5802011/5803011/5804011	2x	2x	3x	3x	2x
Supplementary profile for fixed sidelights 2m	BO 5802031		*		*	
Wall distance profile 2m	BO 5802061	*		*		*
Accessory Set Telescope 2 doors	BO 5800006	1x	1x			1x
Accessory Set Telescope 3 doors	BO 5800007			1x	1x	
Carriages	BO 5800002	2x	2x	3x	3x	2x
Carriages incl. damping mechanism**	BO 5800060/5800080/5800120	4x**	4x**	6x**	6x**	4x**
Glass clamp	BO 5800001	4x	4x	6x	6x	4x
Cover 98 mm height 2/3/4m	BO 5802041/5803041/5804041	2x	2x	2x	2x	1x
Bottom guide	BO 5700005	1x	1x	1x	1x	1x
Adaptor for wall mounting	BO 5800010					*
U-Channels 2.5/5m	BO 6703434/6703446		1x		1x	

\* Quantity depends on the length of the runner.

\*\* Alternative to carriage unit BO 5800002 - The roller units are integrated in the retractable dampers. To install damping on both sides, two carriages are replaced by two retractable dampers.